


SECTION A-A


IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	73 Ω	151 Ω	278 Ω
Minimum	- Ω	121 Ω	- Ω

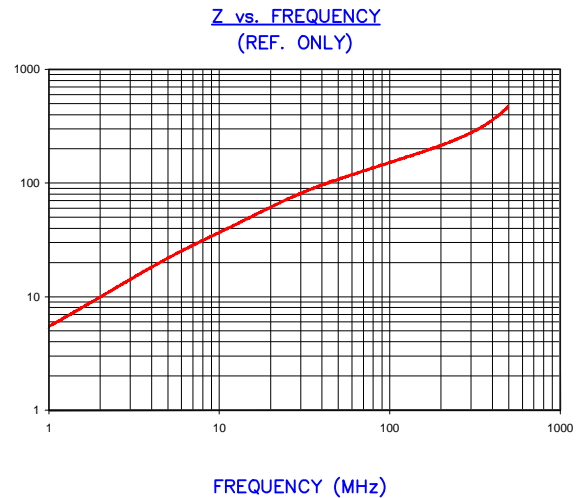


AGILENT E4991A Impedance/Material Analyzer  
HP 16092A-Test Fixture REF #3141

**UNCONTROLLED DOCUMENT**

**RoHS**



DETAIL "A"  
SCALE 8:1

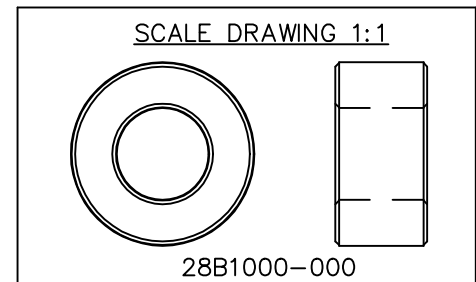

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	25.40 [1.000]	±	0.46 [.018]
B	12.70 [.500]	±	0.25 [.010]
C	12.70 [.500]	±	0.25 [.010]

WEIGHT/1000 23.68 kgs [52.2 Lbs]

DIMENSIONS ARE IN mm (INCHES).				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	DESCRIPTION	DATE	INT				
E	UPDATE THE LOGO	05/13/15	QIU	28B1000-000		E	JRK
D	UPDATE COMPANY LOGO	12/28/12	QIU	DATE:	06/30/04	SCALE:	2 : 1
C	UPDATE Z SPECS AND COMPANY LOGO	06/14/07	JRK	CAD #	28B1000-000-E	TOOL #	B1000
B	CHANGE Z SPEC @ 100 MHZ MIN.	09/18/06	JRK			MATERIAL: FERRITE	
A	ORIGINAL DRAFT	06/30/04	JRK				
REV	DESCRIPTION	DATE	INT				