


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | NOTES |
|----------|-------------|--|------|-------|
| 1 | 50-00265 | Connector, stereo plug, 3.5xL24.5 mm, brass nickel plated | 1 | |
| 2 | 30-00005 | Wire, 2C BC, 24 AWG, 300V, 80C, 3.7 mm, shielded, PVC, 76A | 1 | |
| 3 | 24-00045 | Overmold, PVC, black | 1 | |
| 4 | Heat Shrink | Heat shrink tube, Ø2.0, 30±5, 105°C, black | 1 | |

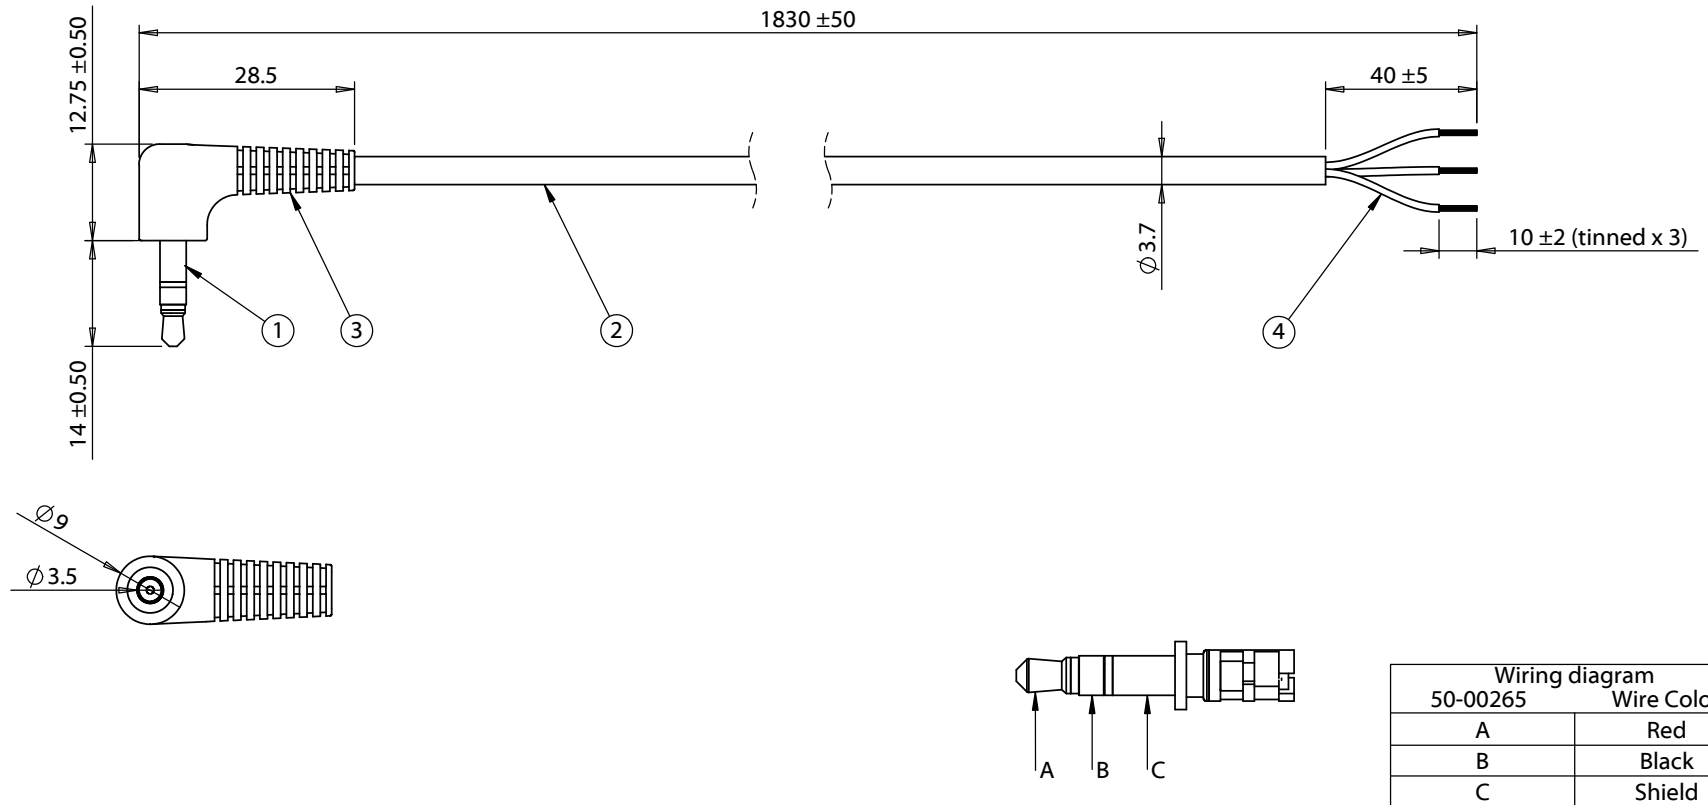

| Revision: | Date: | Description: | Prepared: | Notes: |
|-----------|-----------|--|--|---|
| A1 | 8/31/2011 | Updated description, connector, and wire information | | RoHS and REACH compliant |
| A2 | 3/20/2012 | Added plug and overmold dimensions | Verified: | Function test: no open, no short circuit, no intermittent |
| A3 | 3/26/2012 | Updated wire and plug specifications | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 1830 mm, 3.5 mm 90° 50-00265 stereo plug to stripped tinned, 24 AWG, 30-00005 wire, shielded |
| A4 | 9/23/2014 | Corrected overmold dimensions | | |
| A5 | 2/13/2017 | Updated notes | | |

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

| | |
|------------|---------------------|
| Size: | Part number: |
| A | 053-0282R (CA-2208) |
| Scale: 1:1 | Sheet 1 of 1 |